

PROPOSED SLIDING SASH

CUSTOMER DETAILS

New Addition Windows Ltd
NAWL001

Address:
The Old School House
26 Long Street
Thirst

Job No:
61071A


Your Reference:
SINCLAIR

Tel : 01845 524777
Fax : 01845 524678

North Yorkshire
YO7 1AP

Required Date:

Window 1: Overall size 900w x 1350h: Quantity: 1



Window Energy Rating


A

Description: Vertical Slider
Colour: White Foil
Hardware: White Hardware
Sash Horns: Run-Through Horns
Travel Restrictors: Not Required
Extras: No ventilator
Fixing Cleats: Not Required
Security Rail: Not Required
Deep Bottom: No
Rain eyes: 2
Sash Lifts: 2
D Handle: Not Required
Frame Extenders:
Top: No add-on **Left:** No add-on **Right:** No add-on

Cill Size: 154mm STD CILL

Glass:
A/FLT T+/16WE/FLT LIm : 16mm Black Warm Edge Astragal G Bar 21n
Bar White Foil Taped Argon Gas
A/FLT T+/16WE/FLT LIm : 16mm Black Warm Edge Astragal G Bar 21n
Bar White Foil Taped Argon Gas

Window 2: Overall size 900w x 1350h: Quantity: 1



Window Energy Rating

A

Description: Vertical Slider
Colour: White Foil
Hardware: White Hardware
Sash Horns: Run-Through Horns
Travel Restrictors: Not Required
Extras: No ventilator
Fixing Cleats: Not Required
Security Rail: Not Required
Deep Bottom: No
Rain eyes: 2
Sash Lifts: 2
D Handle: Not Required
Frame Extenders:
Top: No add-on **Left:** No add-on **Right:** No add-on

Cill Size: 154mm STD CILL

Glass:
A/FLT T+/16WE/FLT LIm : 16mm Black Warm Edge Astragal G Bar 21n
Bar White Foil Taped Argon Gas
A/FLT T+/16WE/FLT LIm : 16mm Black Warm Edge Astragal G Bar 21n
Bar White Foil Taped Argon Gas

Window 3: Overall size 900w x 1350h: Quantity: 1



Window Energy Rating

A

Description: Vertical Slider
Colour: White Foil
Hardware: White Hardware
Sash Horns: Run-Through Horns
Travel Restrictors: Not Required
Extras: No ventilator
Fixing Cleats: Not Required
Security Rail: Not Required
Deep Bottom: No
Rain eyes: 2
Sash Lifts: 2
D Handle: Not Required
Frame Extenders:
Top: No add-on **Left:** No add-on **Right:** No add-on

Cill Size: 154mm STD CILL

Glass:
A/FLT T+/16WE/FLT LIm : 16mm Black Warm Edge Astragal G Bar 21n
Bar White Foil Taped Argon Gas
A/FLT T+/16WE/FLT LIm : 16mm Black Warm Edge Astragal G Bar 21n
Bar White Foil Taped Argon Gas

RYEDALE DM

19 NOV 2014

DEVELOPMENT
MANAGEMENT

14/01/28/HOUSE

14/10/2014
mark.cooper

Synseal Extrusions Ltd - Common Road - Huthwaite - Nottinghamshire - NG17 6AD
Tel: 01623 443200 - Fax: 01623 554050 - Email: vsorders@synseal.com
Our conditions of sale (visit www.synseal.com) shall apply to the sale of goods to the exclusion of all items unless agreed in writing by us.

NAWL00:
61071/
EV05496

THIS COPY HAS BEEN MADE BY THE COUNCIL
PLEASE DO NOT REPRODUCE OR ACT AS A COPY
DESIGNER THAT ACT AS A COPY WITHOUT THE PERMISSION OF THE COPYRIGHT OWNER

CUSTOMER DETAILS

New Addition Windows Ltd
NAWL001

Address:
The Old School House
26 Long Street
Thirst

Job No:
61071A

Your Reference:
SINCLAIR

Tel : 01845 524777
Fax : 01845 524678

North Yorkshire
YO7 1AP

Required Date:

Window 4: Overall size 900w x 1350h:

Quantity: 1



Window Energy Rating

A

Description: Vertical Slider

Colour: White Foil

Hardware: White Hardware

Sash Horns: Run-Through Horns

Travel Restrictors: Not Required

Extras: No ventilator

Fixing Cleats: Not Required

Security Rail: Not Required

Deep Bottom: No

Rain eyes: 2

Sash Lifts: 2

D Handle: Not Required

Frame Extenders:

Top: No add-on **Left:** No add-on **Right:** No add-on

Cill Size: 154mm STD CILL

Glass:

A/FLT T+/16WE/FLT LIm : 16mm Black Warm Edge Astragal G Bar 21n
Bar White Foil Taped Argon Gas
A/FLT T+/16WE/FLT LIm : 16mm Black Warm Edge Astragal G Bar 21n
Bar White Foil Taped Argon Gas

Window 5: Overall size 900w x 1350h:

Quantity: 1



Window Energy Rating

A

Description: Vertical Slider

Colour: White Foil

Hardware: White Hardware

Sash Horns: Run-Through Horns

Travel Restrictors: Not Required

Extras: No ventilator

Fixing Cleats: Not Required

Security Rail: Not Required

Deep Bottom: No

Rain eyes: 2

Sash Lifts: 2

D Handle: Not Required

Frame Extenders:

Top: No add-on **Left:** No add-on **Right:** No add-on

Cill Size: 154mm STD CILL

Glass:

A/FLT T+/16WE/FLT LIm : 16mm Black Warm Edge Astragal G Bar 21n
Bar White Foil Taped Argon Gas
A/FLT T+/16WE/FLT LIm : 16mm Black Warm Edge Astragal G Bar 21n
Bar White Foil Taped Argon Gas

Extra Items

THIS COPY HAS BEEN MADE BY OR WITH THE
AUTHORITY OF WYTHAM DISTRICT COUNCIL
PURSUANT TO SECTION 17 OF THE COPYRIGHT
DESIGN AND PATENTS ACT 1988 UNLESS
THAT ACT PROVIDED OTHERWISE EXCEPT IN TO
COPYRIGHT THE COPY MUST NOT BE COPIED
WITHOUT THE EXPRESS PERMISSION OF THE
COPYRIGHT OWNER.

14/10/2014
mark.cooper

Synseal Extrusions Ltd - Common Road - Huthwaite - Nottinghamshire - NG17 6AD
Tel: 01623 443200 - Fax: 01623 554050 - Email: vsordens@synseal.com
Our conditions of sale (visit www.synseal.com) shall apply to the sale of goods to the evolution of all items unless agreed in writing by us.

NAWL00:
61071A
EVO54964

PROPOSED CASEMENT WINDOWS (SINGLE NOT SHOWN)

WORKS ORDER


Customer: SINCLAIR	Unglazed	Input Info: 13-11-2014 Rachel
Reference:	Supply & fix	In Production
Job No. : 21032 (Item: 1)	Page 1 of 4	Print Info: 18-11-2014 10:20 am

Manufacturing Units: 4.60

Main Options:

Product	70mm Featured Casement RI
Size	1200 x 1000
Quantity	4
Design	CASE 16
Frame (Head)	7501 58mm Frame
Frame (Cill)	7501 58mm Frame
Frame (Left jamb)	7501 58mm Frame
Frame (Right jamb)	7501 58mm Frame
Mullion	7532/3 72mm T/Z Section
Sash	6561/60 T/Z Sash
Cill	3640 150mm Cill
Colour	White
Sash colour	White
Cill colour	White
Bead type	Feature Black Gasket
Handle	White Espag Handle
Casement locking	Espag Locking
Viewed from	Viewed from outside
Open in/out	Open out
Glazed in/out	Glazed in
Reinforcing rule	Normal Reinforcing
Reinforcing type	Steel Reinforcing
Tran/Mull joints	Welded joint

Location: KITCHEN

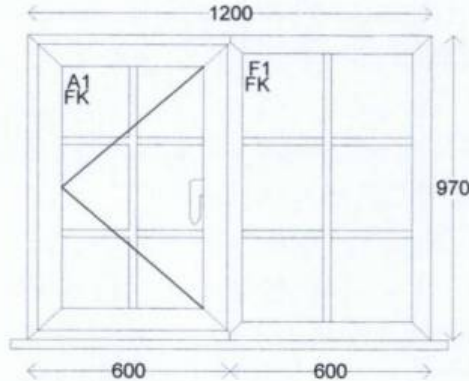

14/01/28 (House
RYEDALE DM

19 NOV 2014

Sections required:				Qty	Length	End prep	Reinforcing	Length
Hor	Frame	7501W50 58mm O/F	4	605	-/			
Hor	Frame	7501W50 58mm O/F	4	605	-/ *	TD3570S Steel		1074
Hor	Frame	7501W50 58mm O/F	4	605	-			
Hor	Frame	7501W50 58mm O/F	4	605	-/ *	TD3570S Steel		1074
Ver	Frame	7501W50 58mm O/F	4	975	-/			
Ver	Frame	7501W50 58mm O/F	4	975	-/ *			
Ver	Mullion	7533W50 72mm Z	4	1003	<->			
Hor	Sash	6560W50 71mm T	8	562	-/ *			
Ver	Sash	6560W50 71mm T	8	910	-/ *	TD3573S Steel		753
Hor	Cill	3640W50 150mm Cill	4	1300	-			

* - Denotes bar reversed

Accessories Required:		Qty	Length
12" S/H Friction stay		4	Pairs
550mm Mushroom Espag		4	Items
Espag keep		8	Items
White Espag Handle		4	Items
SO113 150mm Cill End Caps		4	Pairs

Glass Required:				Qty	Width	Height
A1	4-20-4 Clear Planitherm : 20mm Warm Ed Spacer	Georgian Bar		4	443	791
	25mm Bar White Std Joints	Argon Gas Filled				
F1	4-20-4 Clear Planitherm : 20mm Warm Ed Spacer	Georgian Bar		4	534	882
	25mm Bar White Std Joints	Argon Gas Filled				

THIS COPY HAS BEEN MADE BY OR WITH THE AUTHORITY OF RYEDALE DISTRICT COUNCIL PURSUANT TO SECTION 17 OF THE COPYRIGHT DESIGNS AND PATENTS ACT 1988 UNLESS THAT ACT PROVIDES OTHERWISE EXCEPTION TO COPYRIGHT. THE COPY MUST NOT BE COPIED WITHOUT THE PRIOR PERMISSION OF THE COPYRIGHT OWNER.

WORKS ORDER


Customer: SINCLAIR	Unglazed	Input Info:	13-11-2014 Rachel
Reference:	Supply & fix	In Production	
Job No. : 21032 (Item: 2)	Page 2 of 4	Print Info:	18-11-2014 10:20 am

Manufacturing Units: 1.15

Main Options:

Product	70mm Featured Casement RI
Size	1200 x 1000
Quantity	1
Design	CASE 16
Frame (Head)	7501 58mm Frame
Frame (Cill)	7501 58mm Frame
Frame (Left jamb)	7501 58mm Frame
Frame (Right jamb)	7501 58mm Frame
Mullion	7532/3 72mm T/Z Section
Sash	6561/60 T/Z Sash
Cill	3640 150mm Cill
Colour	White
Sash colour	White
Cill colour	White
Bead type	Feature Black Gasket
Handle	White Espag Handle
Casement locking	Espag Locking
Viewed from	Viewed from outside
Open in/out	Open out
Glazed in/out	Glazed in
Reinforcing rule	Normal Reinforcing
Reinforcing type	Steel Reinforcing
Tran/Mull joints	Welded joint

Location: KITCHEN

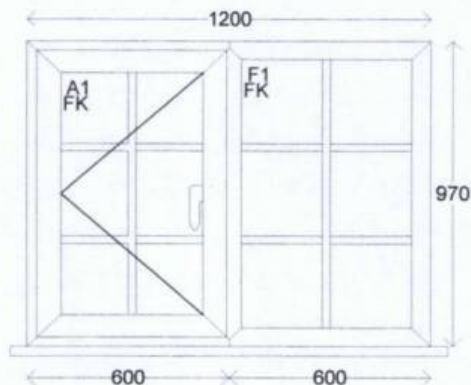

Aperture Options:

Argon Gas Filled

Ref:

(A1)(F1)

Sections required:			Qty	Length	End prep	Reinforcing	Length
Hor	Frame	7501W50 58mm O/F	1	605	-/		
Hor	Frame	7501W50 58mm O/F	1	605	-/ *	TD3570S Steel	1074
Hor	Frame	7501W50 58mm O/F	1	605	\-		
Hor	Frame	7501W50 58mm O/F	1	605	\- *	TD3570S Steel	1074
Ver	Frame	7501W50 58mm O/F	1	975	\-		
Ver	Frame	7501W50 58mm O/F	1	975	\- *		
Ver	Mullion	7533W50 72mm Z	1	1003	<->		
Hor	Sash	6560W50 71mm T	2	562	\- *		
Ver	Sash	6560W50 71mm T	2	910	\- *	TD3573S Steel	753
Hor	Cill	3640W50 150mm Cill	1	1300	-		

* - Denotes bar reversed

Accessories Required:

		Qty	Length
12" S/H Friction stay		1	Pairs
550mm Mushroom Espag		1	Items
Espag keep		2	Items
White Espag Handle		1	Items
SO113 150mm Cill End Caps		1	Pairs

Glass Required:


		Qty	Width	Height
A1	4-20-4 Clear Planitherm : 20mm Warm Ed Spacer Georgian Bar 25mm Bar White Std Joints Argon Gas Filled	1	443	791
F1	4-20-4 Clear Planitherm : 20mm Warm Ed Spacer Georgian Bar 25mm Bar White Std Joints Argon Gas Filled	1	534	882

THIS COPY HAS BEEN MADE BY OR WITH THE AUTHORITY OF RYEGATE DISTRICT COUNCIL PURSUANT TO SECTION 41 OF THE COPYRIGHT, DESIGN AND PATENTS ACT 1988 UNLESS THAT ACT PROVIDES A RELEVANT EXCEPTION TO COPYRIGHT, THE COPY MUST NOT BE COPIED WITHOUT THE PRIOR PERMISSION OF THE COPYRIGHT OWNER.

WORKS ORDER

Customer: SINCLAIR	Unglazed	Input Info: 13-11-2014 Rachel
Reference:	Supply & fix	In Production
Job No. : 21032 (Item: 3)	Page 3 of 4	Print Info: 18-11-2014 10:20 am

Manufacturing Units: 1.15	
Main Options:	
Product	70mm Featured Casement RI
Size	1200 x 1000
Quantity	1
Design	CASE 16
Frame (Head)	7501 58mm Frame
Frame (Cill)	7501 58mm Frame
Frame (Left jamb)	7501 58mm Frame
Frame (Right jamb)	7501 58mm Frame
Mullion	7532/3 72mm T/Z Section
Sash	6561/60 T/Z Sash
Cill	3640 150mm Cill
Colour	White
Sash colour	White
Cill colour	White
Bead type	Feature Black Gasket
Handle	White Espag Handle
Casement locking	Espag Locking
Viewed from	Viewed from outside
Open in/out	Open out
Glazed in/out	Glazed in
Reinforcing rule	Normal Reinforcing
Reinforcing type	Steel Reinforcing
Tran/Mull joints	Welded joint
Location: KITCHEN	

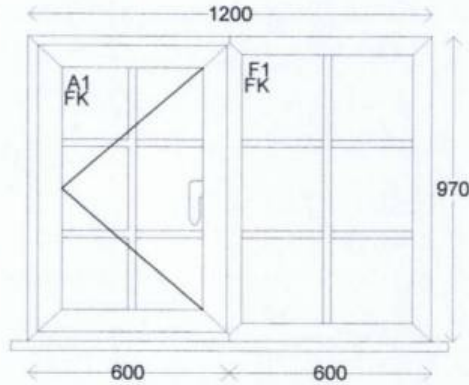

Aperture Options:	Ref:
Argon Gas Filled	(A1)(F1)

Sections required:		Qty	Length	End prep	Reinforcing	Length
Hor	Frame 7501W50 58mm O/F	1	605	-/		
Hor	Frame 7501W50 58mm O/F	1	605	-/ *	TD3570S Steel	1074
Hor	Frame 7501W50 58mm O/F	1	605	\-		
Hor	Frame 7501W50 58mm O/F	1	605	\- *	TD3570S Steel	1074
Ver	Frame 7501W50 58mm O/F	1	975	\-		
Ver	Frame 7501W50 58mm O/F	1	975	\- *		
Ver	Mullion 7533W50 72mm Z	1	1003	<->		
Hor	Sash 6560W50 71mm T	2	562	\- *		
Ver	Sash 6560W50 71mm T	2	910	\- *	TD3573S Steel	753
Hor	Cill 3640W50 150mm Cill	1	1300	-		

* - Denotes bar reversed

Accessories Required:		Qty	Length
12" S/H Friction stay		1	Pairs
550mm Mushroom Espag		1	Items
Espag keep		2	Items
White Espag Handle		1	Items
SO113 150mm Cill End Caps		1	Pairs

Glass Required:		Qty	Width	Height
A1	4-20-4 Clear Planitherm : 20mm Warm Ed Spacer Georgian Bar 25mm Bar White Std Joints Argon Gas Filled	1	443	791
F1	4-20-4 Clear Planitherm : 20mm Warm Ed Spacer Georgian Bar 25mm Bar White Std Joints Argon Gas Filled	1	534	882

THIS COPY HAS BEEN MADE BY OR WITH THE AUTHORITY OF RYSDALE DISTRICT COUNCIL PURSUANT TO SECTION 47 OF THE COPYRIGHT, DESIGNS AND PATENTS ACT 1988. UNLESS THAT ACT PROVIDED A RELEVANT EXCEPTION TO COPYRIGHT, THE COPY MUST NOT BE COPIED WITHOUT THE PRIOR PERMISSION OF THE COPYRIGHT OWNER.


WORKS ORDER

Customer: SINCLAIR	Unglazed	Input Info: 13-11-2014 Rachel
Reference:	Supply & fix	In Production
Job No. : 21032 (Item: 4)	Page 4 of 4	Print Info: 18-11-2014 10:20 am

Manufacturing Units: 1.15

Main Options:

Product	70mm Featured Casement RI
Size	1200 x 1000
Quantity	1
Design	CASE 16
Frame (Head)	7501 58mm Frame
Frame (Cill)	7501 58mm Frame
Frame (Left jamb)	7501 58mm Frame
Frame (Right jamb)	7501 58mm Frame
Mullion	7532/3 72mm T/Z Section
Sash	6561/60 T/Z Sash
Cill	3640 150mm Cill
Colour	White
Sash colour	White
Cill colour	White
Bead type	Feature Black Gasket
Handle	White Espag Handle
Casement locking	Espag Locking
Viewed from	Viewed from outside
Open in/out	Open out
Glazed in/out	Glazed in
Reinforcing rule	Normal Reinforcing
Reinforcing type	Steel Reinforcing
Tran/Mull joints	Welded joint

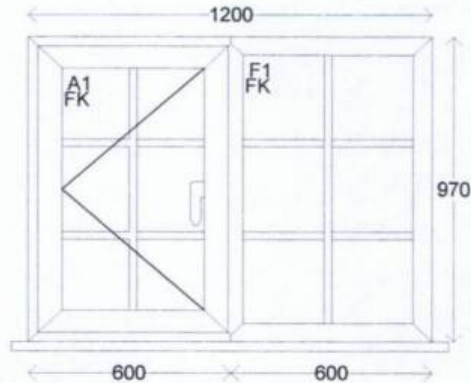

Aperture Options:

Argon Gas Filled	Ref: (A1)(F1)
------------------	---------------

Location: KITCHEN

Sections required:			Qty	Length	End prep	Reinforcing	Length
Hor	Frame	7501W50 58mm O/F	1	605	-/		
Hor	Frame	7501W50 58mm O/F	1	605	-/ *	TD3570S Steel	1074
Hor	Frame	7501W50 58mm O/F	1	605	\-		
Hor	Frame	7501W50 58mm O/F	1	605	\- *	TD3570S Steel	1074
Ver	Frame	7501W50 58mm O/F	1	975	\-/		
Ver	Frame	7501W50 58mm O/F	1	975	\-/ *		
Ver	Mullion	7533W50 72mm Z	1	1003	<->		
Hor	Sash	6560W50 71mm T	2	562	\-/ *		
Ver	Sash	6560W50 71mm T	2	910	\-/ *	TD3573S Steel	753
Hor	Cill	3640W50 150mm Cill	1	1300	-		

* - Denotes bar reversed

Accessories Required:

		Qty	Length
12" S/H Friction stay		1	Pairs
550mm Mushroom Espag		1	Items
Espag keep		2	Items
White Espag Handle		1	Items
SO113 150mm Cill End Caps		1	Pairs

Glass Required:


			Qty	Width	Height
A1	4-20-4 Clear Planitherm : 20mm Warm Ed Spacer	Georgian Bar	1	443	791
	18mm Bar White	Std Joints Argon Gas Filled			
F1	4-20-4 Clear Planitherm : 20mm Warm Ed Spacer	Georgian Bar	1	534	882
	18mm Bar White	Std Joints Argon Gas Filled			

THIS COPY HAS BEEN MADE BY OR WITH THE
AUTHORITY OF RYEDALE DISTRICT COUNCIL
PURSUANT TO SECTION 47 OF THE COPYRIGHT
DESIGNS AND PATENTS ACT 1988 UNLESS
THAT ACT PROVIDES A RELIEF EXCEPT TO
COPYRIGHT, THIS COPY MUST NOT BE COPIED
WITHOUT THE PRIOR PERMISSION OF THE
COPYRIGHT OWNER.


Diamond 70mm Featured Suite




Frame Profiles (70mm PVC-U System)

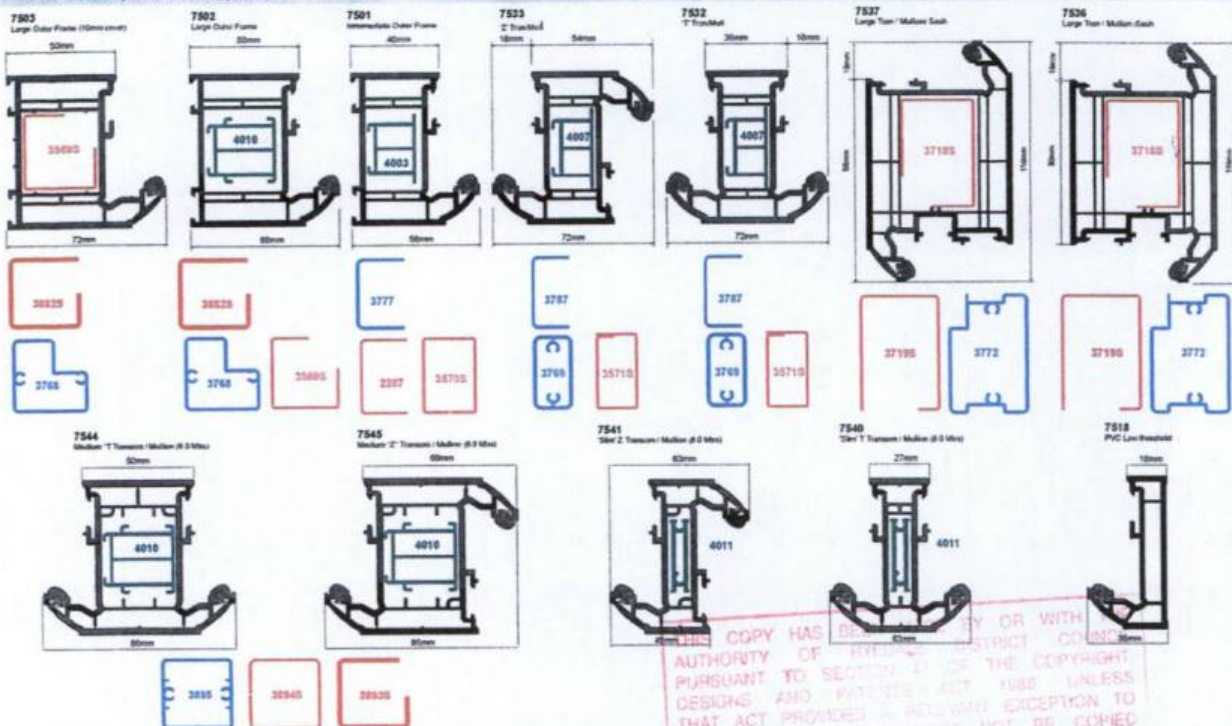

Profiles (65mm PVC-U System)

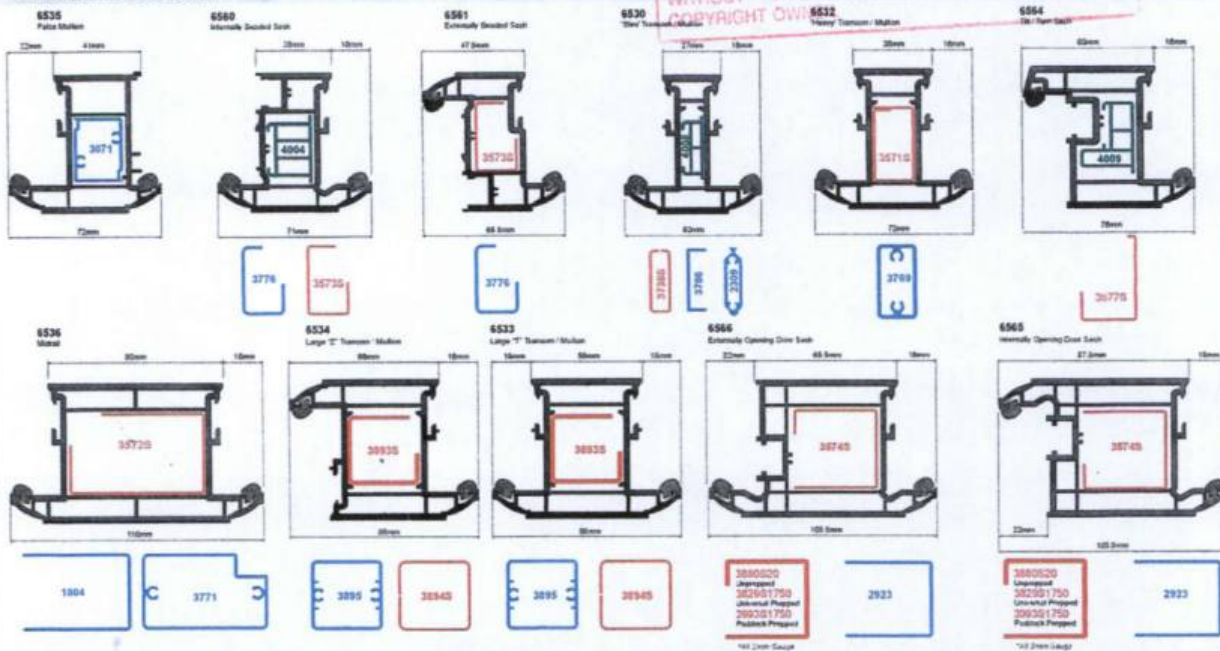

Glazing Beads



Profile Finish

All PVC-U profiles are available in both white and woodgrain finishes. To order either white or woodgrain follow the part no. with -w for white, -bn for woodgrain or -go for golden oak.

ie Order Code 7501w50 = Intermediate Outer Frame (White) 54mm Length
 7501bn50 = Intermediate Outer Frame (Woodgrain) 54mm Length
 7501go50 = Intermediate Outer Frame (Golden Oak) 54mm Length

● ALU ● STEEL ● THERMAL INSULATED

CERTIFICATE of DOCUMENT 'L' COMPLIANCE

The Duraflex 70mm Diamond Suite casement window system has been thermally simulated in accordance with BSENISO 10077-2: 2009 and the following specification using the Standard intermediate outerframe achieve –
WER of band 'A' and a 'U' value of 1.3 W/m²

28mm unit width comprising of –
4mm Float outer pane
Swisspacer V spacer bar
90% Argon cavity fill
4mm Planitherm Total + inner pane
Fully reinforced with Thermal insert

Duraflex simulation no. **545**
Approved simulator no. **054**

THIS COPY HAS BEEN MADE BY OR WITH THE
AUTHORITY OF WYRDLE DISTRICT COUNCIL
PURSUANT TO SECTION 47 OF THE COPYRIGHT,
DESIGN AND PATENTS ACT 1988. UNLESS
THAT ACT PROVIDES A RELEVANT EXCEPTION TO
COPYRIGHT THE COPY MUST NOT BE COPIED
WITHOUT THE PRIOR PERMISSION OF THE
COPYRIGHT OWNER

30th January 2012

David M Riley
Standards & Accreditations Manager
Duraflex Limited

Duraflex Limited, Severn Drive, Tewkesbury Business Park, Tewkesbury, Gloucestershire GL20 8SF
Tel: 08705 351351 Fax: 01684 852701 Email: info@duraflex.co.uk www.duraflex.co.uk Registered in England No. 4294134
A Masco Company



KM33502



KM12894



PAS23/24




Assessment Report
No's – 1576, 2662



Certificate No. 04/4902
Duraframe Cavity



EMS 514848



FM 10093

